

AccuBird®



The well-proven Blind rivet setting tool, now with new Li-Ion energy

Reliability

- Electronic control
- No mechanical switching components
- Electronic temperature and overload protection
- High reliability through low loss power transmission via a highly efficient ball screw drive

Freedom

- Cablefree tool for flexible operation in installation jobs and industry production

High performance

- High pulling force for safe setting of blind rivets up to 5 mm diameter in all materials
- High yield per battery charge
- 20 mm stroke



AccuBird® with 14.4 V/1.3 Ah battery and charger, in metall carrying case

Part No. 725 0037

AccuBird® with 14.4 V/1.3 Ah battery and charger, in cardboard box

Part No. 725 0029

AccuBird® with two 14.4 V/1.3 Ah batteries and charger, in metall carrying case

Part No. 725 0019

AccuBird® with 14.4 V/1.3 Ah battery and charger with spring loaded trigger system in metal carrying case

Part No. 725 0015

High speed

- High speed of operation through automatic resetting of the jaw mechanism immediately after each setting process

With new Li-Ion Energy

- Choice of 1.3 Ah and 2.6 Ah Li-Ion batteries
- No memory-effect
- High energy yield through high voltage and low weight increase ease and speed of operation
- Very low self-discharge
- New battery shape allow the tool to be stored standing on its battery

Cleverly designed

- Exchange nosepieces and wrench always in the tool
- Compact, shockproof tool housing
- Broken mandrel evacuation into the mandrel container through back tilting or forwards through the nosepiece by gravity
- Fatiguefree working through well balanced weight repartition and ergonomic grip

Versatility

Blind rivets up to 5 mm Ø all materials. BULB-TITE® Blind rivets 4; 5.2 and 6.3 mm Ø Alu and Steel

GESIPA Blindniettechnik GmbH
Nordendstraße 13-39
64546 Mörfelden-Walldorf
Germany

T +49 (0) 6105 962 0
F+49 (0) 6105 962 287
info@gesipa.com
www.gesipa.com

A company of **SFS intec**

GESIPA®

The well-proven blind rivet setting tool, now with new Li-Ion Energy

Technical characteristics

Drive:	DC-motor
Pulling force:	10,000 N
Stroke:	20 mm
Weight (incl. 1.3 Ah battery):	2.0 kg (4.4 lbs)


	1.3 Ah battery	2.6 Ah battery
Nominal voltage	14,4 V	14,4 V
Capacity	1.3 Ah	2.6 Ah
Number of cells	4	8
Cell type	Li-Ion	Li-Ion
Weight	0.35 kg	0.5 kg
Part No.	725 1045	725 1049

Battery charger

Primary voltage:	230V/50Hz
Charging time (full charge):	50 to 100 minutes (acc. to battery type)
Weight:	0.6 kg (1.32 lbs)

Part No. 725 1134

Dimensions

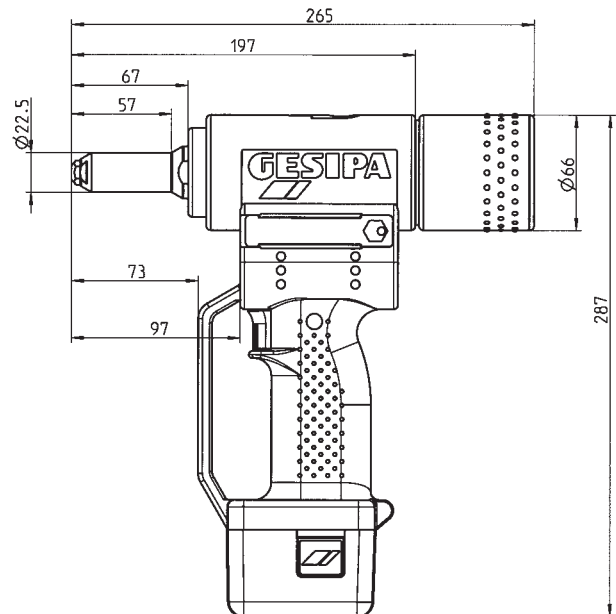

Nosepiece allocation – Typical performance per charge

Blind rivet Ø in mm	Material	pcs/battery charge (1.3 Ah)	Nosepiece	P/N
2.4	alu	1,500	17/18*	725 2075
3.2	CAP alu, CAP CU	1,100	17/18*	725 2075
3 and 3.2	alu	800	17/24	725 1583
3 and 3.2	steel	800	17/24	725 1583
3 and 3.2	stainless steel	800	17/24	725 1583
4	alu	800	17/24	725 1583
4	steel	700	17/27	725 2040
4	stainless steel	640	17/29	725 2059
4.8 and 5	alu	550	17/29	725 2059
4.8 and 5	steel	420	17/32	725 2067
4.8 and 5	stainless steel	320	17/36*	725 2083
6	alu	240	17/36*	725 2083

BULB-TITE® Blind rivets

4	alu/alu	1,000	17/26 BT*	725 2202
5.2	alu/alu	800	17/32 BT*	725 2210
6.3	alu/alu	600	17/42 BT*	725 2229
6.3	steel/steel	300	17/42 BT*	725 2229

* Available as special accessory. Special nosepieces available on request.



Your partner